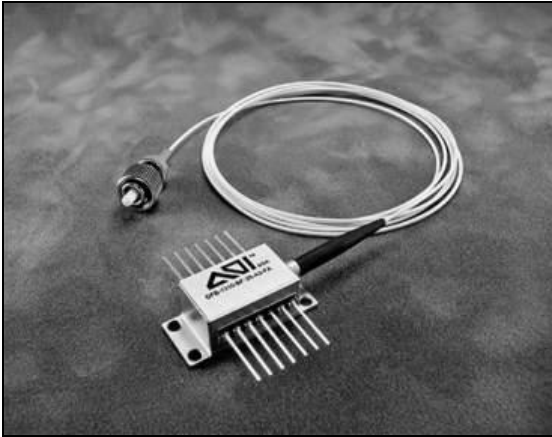


DFB-1xxx-BF-xx-2.5-xx

**Description**

The DFB-1xxx-BF-xx-2.5-xx series of Multi-Quantum Well (MQW) Distributed Feedback (DFB) lasers have been designed specifically to satisfy the requirements of SONET CWDM transmission.

The devices feature high output power and wide operating temperature range.

Their 14-pin butterfly packages are pin-compatible with standard SONET OC-48 devices.

Features

- ❑ Advanced Multiple Quantum Well (MQW) Distributed Feedback (DFB) Laser Design
- ❑ High-speed up to 2.5 Gbps
- ❑ Engineered Specifically for SONET transmitter applications
- ❑ Industry-standard 14-pin Butterfly package
- ❑ 1-meter SMF-28 Fiber Pigtail

Applications

- ❑ SONET 2.5 Gbps transmitter
- ❑ Intermediate and long-distance fiber-optic transmitter





DFB-1xxx-BF-xx-2.5-xx

Absolute Maximum Ratings

Parameter	Symbol	Condition	Min	Max	Unit
Operating Case Temperature	T_c	$I=I_{op}$	-20	65	°C
Storage Temperature	T_{stg}	--	-40	85	°C
Laser Forward Current	I_f	--	--	120	mA
Laser Reverse Bias	V_r	--	--	2	V
Photodiode Reverse Bias	V_{rpd}	--	--	10	V
TEC Current	I_{TEC}	-20 °C < T_c < 65 °C, $T_{op}=25$ °C, $I_f=100$ mA	--	1.5	A

Electrical and Optical Characteristics

Parameters are over operating temperature range unless otherwise noted.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Operating Temperature	T	-20	--	65	°C	
Optical Output Power*	P_o	6.0	--	13.0	mW	CW
Threshold Current	I_{th}	--	14	20	mA	$T_i=25$ °C
Forward Voltage	V_F	--	1.2	1.9	V	$P_o=P_r$
Modulation Current	I_{mod}	13	20	33	mA	$P_o=P_r$
Slope Efficiency	SE	0.14	--	0.30	mW/mA	CW, $P_o=P_r$
Center Wavelength**	λ_c	1460	--	1620	nm	$P_o=P_r$, CW
Center Wavelength Accuracy	$\Delta\lambda$	--	--	+/- 3	nm	$T=25$ °C
Spectral Width (-20 dB)	$\Delta\lambda$	--	0.1	1.0	nm	$P_o=P_r$
Side-mode Suppression Ratio	SMSR	-30	-40	--	dB	$P_o=P_r$
Rise/Fall Times	t_{Rr} , t_F	--	--	0.1	ns	$P_o=P_r$, Peak, 20% to 80%
Relaxation Oscillation Frequency	f_R	--	4.5	--	GHz	$P_o=P_r$
Monitor Current	I_{mon}	10	--	150	μA/mW	$V_{rpd}=5$ V
Monitor Dark Current	I_D	10	--	200	nA	$V_{rpd}=5$ V
Optical Isolation	ISO	30	--	--	dB	CW
Relative Intensity Noise	RIN	--	-150	-145	dB/Hz	$P_o=P_r$, 50 MHz to 2.5 GHz
Tracking Error	γ	-0.5	--	0.5	dB	$I_{mon}=const$, $\gamma=10 \log (P_o/P_r)$ [dB]
Thermistor Resistance	R_t	9.5	--	10.5	kΩ	$T=25$ °C
Thermistor B Constant	B	--	3900	--	K	$T=25$ °C
TEC Current	I_C	--	--	1.5	A	$\Delta T=40$ °C
TEC Voltage	V_C	--	--	2.0	V	$\Delta T=40$ °C

* See Ordering Options for output power ratings available.

** See Ordering Options for wavelength ranges available.

Electrical Schematics

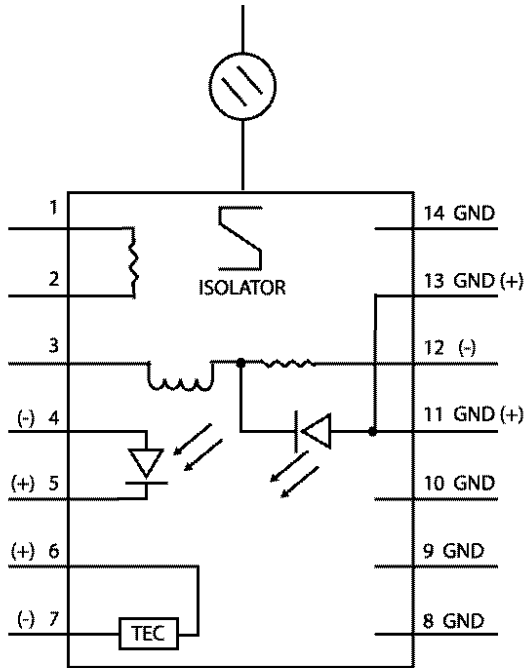




Figure 1. Laser Schematic



DFB-1xxx-BF-xx-2.5-xx

Outline Diagram

Dimensions are in millimeters

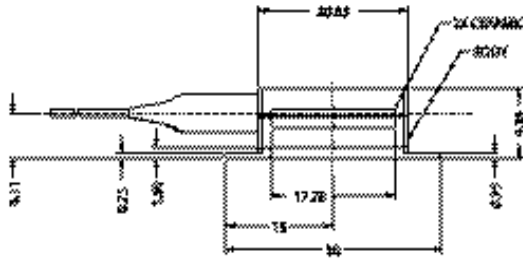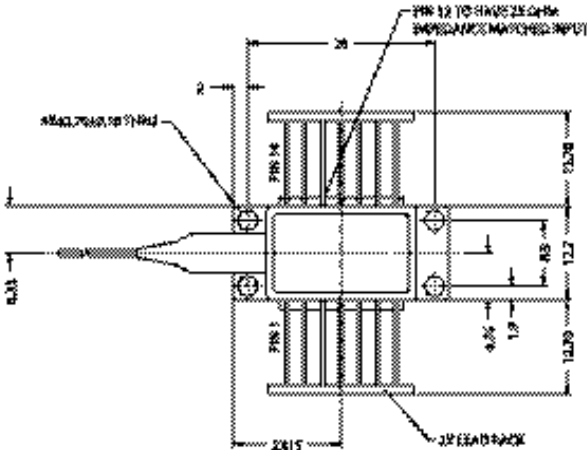

Pin Information

Pin No.	Description
1	Thermistor
2	Thermistor
3	Dc Laser Bias (-)
4	MPD Anode (-)
5	MPD Cathode (+)
6	Thermoelectric Cooler (+)
7	Thermoelectric Cooler (-)
8	Case Ground
9	Case Ground
10	Case Ground
11	Laser Common (+), Case Ground
12	Laser Modulation (-)
13	Laser Common (+), Case Ground
14	Case Ground

Ordering Options

DFB-1xxx-BF-xx-2.5-xx

270=1270 nm	450=1450 nm
290=1290 nm	470=1470 nm
310=1310 nm	490=1490 nm
330=1330 nm	510=1510 nm
350=1350 nm	530=1530 nm
370=1370 nm	550=1550 nm
390=1390 nm	570=1570 nm
410=1410 nm	590=1590 nm
430=1430 nm	610=1610 nm

P_r
06= 6 mW
08= 8 mW
10= 10 mW
13=13 mW

SC=SC/PC
FC=FC/PC
SA=SC/APC
FA=FC/APC
NC=No Connector

DFB-1xxx-BF-xx-2.5-xx

Safety Information

All versions of this laser are Class 1M laser products per IEC¹/EN² 60825-1:2001-08. Users should observe safety precautions such as those recommended by ANSI³ Z136.1-2000, ANSI Z36.2-1997 and IEC 60825-1:2001-08.

Notes about Laser Safety Class:

The Food and Drug Administration's Center for Devices and Radiological Health (FDA/CDRH) in the USA has decided to harmonize their requirements with 21 CFR 1040.10 and 1040.11 with the IEC/EN 60825-1 and IEC/EN 60601-2-22 standards. This process has not yet happened and in the interim, the CDRH agency has released ['Laser Notice No.50'](#) to reduce the regulatory burden. This notice allows IEC/EN classification and labeling of lasers within the USA.

IEC¹/EN² 60825-1 Laser Class

Class 1M: laser is safe for all conditions of use except when passed through magnifying optics such as microscopes and telescopes. Class 1M lasers produce large-diameter beams, or beams that are divergent. The MPE for a Class 1M laser cannot normally be exceeded unless focusing or imaging optics are used to narrow the beam. If the beam is refocused, the hazard of Class 1M lasers may be increased and the product class may be changed. A laser can be classified as Class 1M if the total output power is below (IEC/EN) class 3B but the power that can pass through the pupil of the eye is within Class 1.

FDA Laser Class

Class IIIB: moderate power lasers (cw: 5-500 mW, pulsed: 10 J/cm² or the diffuse reflection limit, whichever is lower). In general Class IIIB lasers will not be a fire hazard, nor are they generally capable of producing a hazardous diffuse reflection. Specific controls are recommended.


This product does not conform to 21 CFR 1040.10 and 1040.11. Consequently, this laser module is only intended for use as a component by manufacturers of electronic products and equipment.

Wavelength = 1270 – 1610 nm
 Maximum Power = 75mW
 Single-mode fiber pigtail
 Fiber Numerical Aperture = 0.14

Labeling is not affixed to the laser module due to size constraints; rather, labeling is placed on the outside of the shipping box.

This product is not shipped with a power supply.

Caution: use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

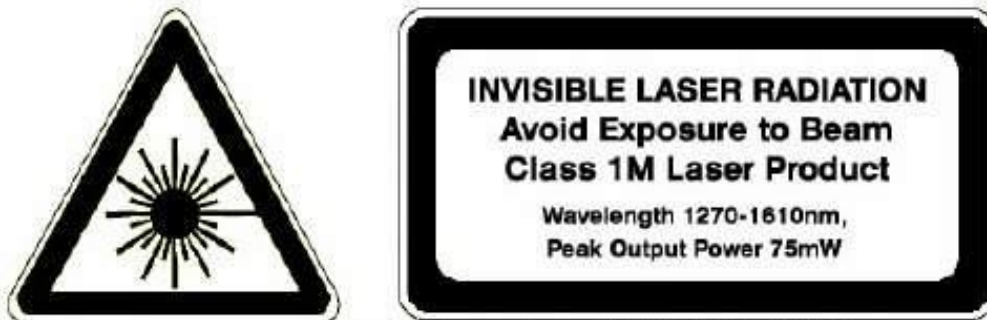

classified in accordance with IEC 60825-1: 2001-08

(1) IEC is a registered trademark of the International Electrotechnical Commission

(2) Within Europe the IEC standard has been adopted as a European Normative standard known as EN 60825, and each European country will have its own version of this standard, for example, the British Standards version known as BS EN 60825. There can be small differences between the different countries versions of EN 60825, and these are in part caused by the process of translating the standard into the native language of that country.

(3) ANSI is a registered trademark of the American National Standards Institute.